


SECTION A-A

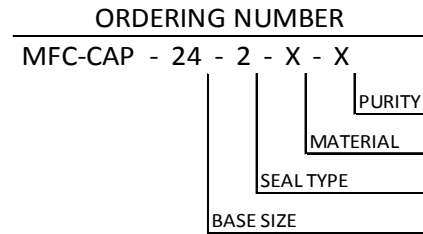

- MATERIAL DESIGNATORS**
- S = 316L SST SEMI F20
 - A = 316L
 - B = 316L SST SEMI F20 VIM/VAR
 - N = NICKEL 200
 - M = NICKEL 400
 - H = NICKEL ALLOY C22

- PURITY DESIGNATORS**
- S = STANDARD FINISH
 - H = HIGH PURITY
 - U = ULTRA-HIGH PURITY

NOTES:
 1. DRAWINGS FOR SPECIFICATION PURPOSES AND ARE FOR REFERENCE ONLY.
 2. ALL VERSIONS OF THE DRAWING ARE SUPERSEDED BY THIS RELEASE AND SUBJECT TO CHANGE WITHOUT NOTIFICATION.

EFFECTIVE DATE: 2/6/2017	<p>1003 INDUSTRIAL DRIVE SAUK RAPIDS, MN 56379 VOICE: 320-251-0390 FAX: 320-251-5810</p>
INTERPRET DRAWING PER: ASME Y14.5-2009	
THIRD ANGLE PROJECTION:	
PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF TALON INNOVATIONS, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF TALON INNOVATIONS, INC. IS PROHIBITED.	DESCRIPTION: MFC FLOW THRU CAP 1.500" W-SEAL
DO NOT SCALE DRAWING	SIZE: C SCALE: 3:2 SHEET 1 OF 1